


Designation	Depth of Section D	DIMENSIONS				
		Flange		Web Thickness	Root Radius	Depth Between Flanges
		Width	Thickness			
Kg/m	mm	Bf	Tf	Tw	R1	D1
610UB 125.0	612	229	19.6	11.9	14.0	572
113.0	607	228	17.3	11.2	14.0	572
101.0	602	228	14.8	10.6	14.0	572
530UB 92.4	533	209	15.6	10.2	14.0	502
82.0	528	209	13.2	9.6	14.0	502
460UB 82.1	460	191	16.0	9.9	11.4	428
74.6	457	190	14.5	9.1	11.4	428
67.1	454	190	12.7	8.5	11.4	428
410UB 59.7	406	178	12.8	7.8	11.4	381
53.7	403	178	10.9	7.6	11.4	381
360UB 56.7	259	172	13.0	8.0	11.4	333
50.7	356	171	11.5	7.3	11.4	333
44.7	352	171	9.7	6.9	11.4	333
310UB 46.2	307	166	11.8	6.7	11.4	284
40.4	304	165	10.2	6.1	11.4	284
32.0	298	149	8.0	5.5	13.0	282
250UB 37.3	265	146	10.9	6.4	8.9	234
31.4	252	146	8.6	6.1	8.9	234
25.7	248	124	8.0	5.0	12.0	232
200UB 29.8	207	134	9.6	6.3	8.9	188
25.4	203	133	7.8	5.8	8.9	188
22.3	202	133	7.0	5.0	8.9	188
18.2	198	99	7.0	4.5	11.0	184
180UB 22.2	179	90	10.0	6.0	8.9	159
18.1	175	90	8.0	5.0	8.9	159
150UB 18.0	155	75	9.5	6.0	8.0	136
14.0	150	75	7.0	5.0	8.0	136

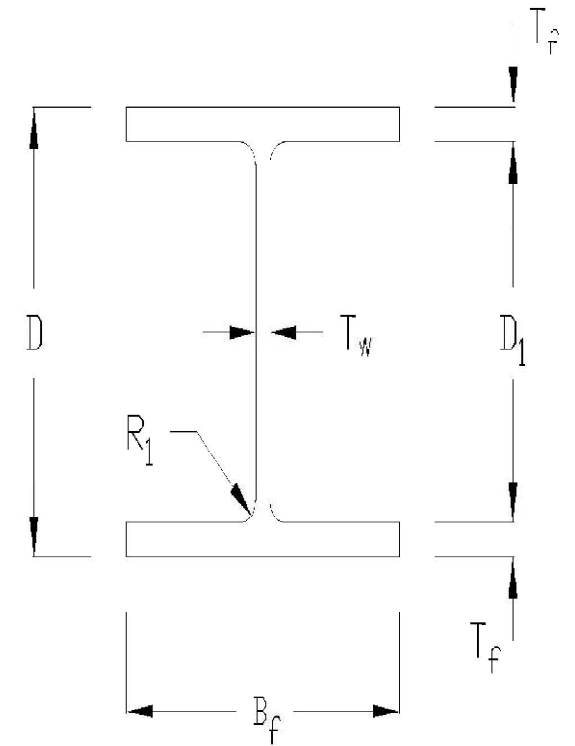

UNIVERSAL BEAM