


Designation	Depth of Section D	DIMENSIONS		Web Thickness Tw	Depth Between Flanges D1
		Flange			
		Width Bf	Thickness Tf		
Kg/m	mm	mm	mm	mm	mm
1200WB455	1200	500	40.0	16.0	1120
423	1192	500	36.0	16.0	1120
392	1184	500	32.0	16.0	1120
342	1184	400	32.0	16.0	1120
317	1176	400	28.0	16.0	1120
278	1170	350	25.0	16.0	1120
249	1170	275	25.0	16.0	1120
1000WB322	1024	400	32.0	16.0	960
296	1016	400	28.0	16.0	960
258	1010	350	25.0	16.0	960
215	1000	300	20.0	16.0	960
900WB282	924	400	32.0	12.0	860
257	916	400	28.0	12.0	860
218	910	350	25.0	12.0	860
175	900	300	20.0	12.0	860
800WB	816	300	28.0	10.0	760
168	810	275	25.0	10.0	760
146	800	275	20.0	10.0	760
122	792	250	16.0	10.0	760
700WB173	716	275	28.0	10.0	660
150	710	250	25.0	10.0	660
130	700	250	20.0	10.0	660
115	692	250	16.0	10.0	660

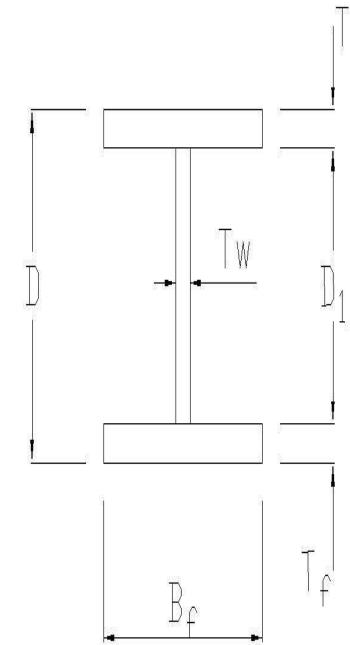

WELDED BEAMS