


Designation	Depth of Section D	DIMENSIONS		Web Thickness Tw	Depth Between Flanges D1
		Flange			
		Width Bf	Thickness Tf		
Kg/m	mm	mm	mm	mm	mm
500WC 440	480	500	40.0	40.0	400
414	480	500	40.0	32.0	400
383	472	500	36.0	32.0	400
340	514	500	32.0	25.0	450
290	506	500	28.0	20.0	450
267	500	500	25.0	20.0	450
228	490	500	20.0	20.0	450
400WC 361	430	400	40.0	40.0	350
328	430	400	40.0	28.0	350
303	422	400	36.0	28.0	350
270	414	400	32.0	25.0	350
212	400	400	25.0	20.0	350
181	390	400	20.0	20.0	350
144	283	400	16.0	16.0	350
350WC 280	355	350	40.0	28.0	275
258	347	350	36.0	28.0	275
230	339	350	32.0	25.0	275
197	331	350	28.0	20.0	275

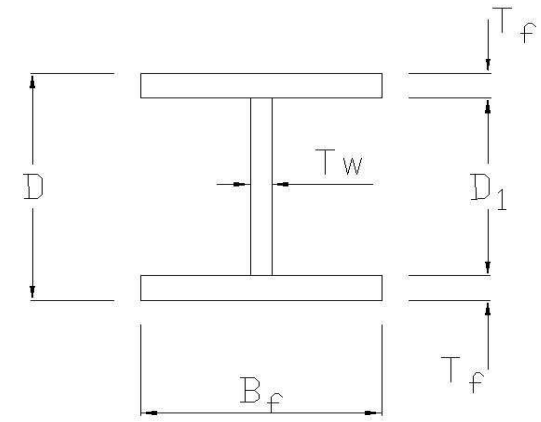

WELDED COLUMNS